

Introducing the Domestic and Commercial S-Series® Lifts a space-efficient lift for a new class of vehicles. The Ricon S-Series lifts elevate the industry standard for excellence.




THE RICON S-SERIES LIFTS ELEVATE THE INDUSTRY STANDARD FOR EXCELLENCE

The S-Series offers fully automatic solid and split platform options featuring the security of the industry-leading Ricon Safety Zone. Compact and simple to operate, the innovative S-Series lift design provides unobstructed access and egress to vehicles.

PERFORMANCE, RELIABILITY AND VALUE

Ricon S-Series wheelchair lifts formed the catalyst, setting the industry standard for performance, value and ease of use. These innovative design features include:

- Unparalleled interior access.
- Non-intrusive space-saving footprint.
- Easy operation and maintenance.
- Full after sales service package.
- Providers to Motability and Local Authority Schemes.

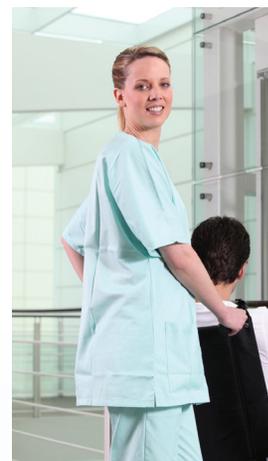

The Domestic & Commercial S-Series® Wheelchair Lift

FEATURES:

- Industry-leading Ricon Safety Zone: Combines front and rear rollstops and handrails, secures passengers during lift operation.
- Exclusive split-platform design enables clear access to vehicle interior.
- Simple and reliable operation provides convenient vehicle access for wheelchairs and scooters.
- Powerful hydraulic pump assures smooth, stable operation.
- Pre-lubricated bearings at all major pivot points for long-term durability.
- All steel construction with high gloss, polyester powder coat finish resists corrosion.
- Individual Vehicle Approval (IVA) compliant lifts available.
- Standard lifts rated at 350kg.
- Bariatric lifts available at 500Kg.
- ADA regulation compliant.
- Available with built in alarms and ski wheels.
- 5-year Limited Warranty.



ADVANCED RICON LIFT TECHNOLOGY FEATURES RELIABLE PERFORMANCE AND USER-FRIENDLY DESIGN

TOP-MOUNTED MAGNETIC HAND CONTROL PENDANT – with multiple stow points and convenient coiled cord. Can be attached directly to the frame when lift is stowed or operating.

CERTIFICATE OF INITIAL FITMENT (COIF) EMERGENCY RELEASE optional COIF release mechanism complies with schedule 6 of the 1986 construction and use regulations allowing full lift deployment for rapid vehicle evacuation in the event of an emergency.

MANUAL BACKUP SYSTEM – hand pump mechanism provides manual lift operation in case of power loss.

SLIDE-OFF PUMP COVER WITH “SECUR-STOR” BACKUP TOOL STORAGE – easy access with no bolts to remove, simply push the top-mounted cover release and pull up for total access to the manual backup tool, pump and electrical components.

PLUG AND PLAY INTERFACE – for door openers, remote control.

CYCLE COUNTER – provides for more accurate information for service and maintenance teams.

OCCUPANT CONTROL SWITCH – optional control switch allows occupant to lower or raise the lift platform.

AUTOMATIC INBOARD ROLLSTOP – features quiet patented Sto-Loc™ self-adjusting mechanism with built in fail safe features.

OUTER ROLLSTOP SWITCH – limits platform travel if not locked into position.

TIGHTER MESH NON SKID PLATFORM – for greater rigidity and improved performance.


ANTIMICROBIAL COATING – to handrails can be provided as an optional extra.

LIFT WEIGHTS – between 154-168Kg.

Made in the USA



DIMENSIONS Inches/Millimetres

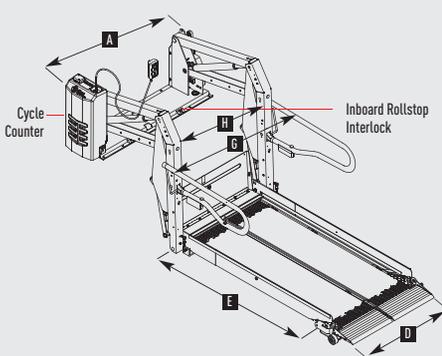

Model	Standard Platform Type	A Stationary Frame Width	B Height when stowed (In initial travel)	C Installation Depth (Stowed)	D Usable Platform Width	E Usable Platform Length	F Floor-to-Ground Travel	G Travelling Frame Width	H Clear Entry Width (Deployed)	I Walk Through Lift Width (Stowed)
S1132	Split	41/1041	41/1041	17.5/445	26/660	37.5/953	27/686	33.5/851	27/686	14.5/368
S1200	Solid	45/1143	47/1194	14/356	29.5/749	43.5/1105	31/787	38/965	31/787	n/a
S1231	Split	45.5/1158	45.5/1158	19/483	30/762	41.5/1041	31/787	37.5/953	31/787	18/457
S2005	Solid	47/1194	55/1397	14/356	32/813	50.5/1283	42/1067	40/1016	33/838	n/a
S2006	Solid	55/1397	55/1397	14.5/368	39/991	48/1219	42/1067	47/1194	40.5/1029	n/a
S2014	Solid	54.5/1384	63/1600	14.5/368	39.5/1003	59/1499	42/1067	48/1219	40.5/1029	n/a
S2030	Split	46/1168	55/1397	19/483	30/762	48/1219	42/1067	41/1041	31/787	17/432
S2034	Split	46/1168	70/1778	19/483	30/762	63/1600	42/1067	42/1067	31/787	16/406
S2036	Split	47/1194	55/1397	19/483	32/813	51/1295	42/1067	43.5/1105	33/838	19.5/495
S2038	Split	47/1194	70/1778	19/483	32/813	63/1600	42/1067	43.5/1105	33/838	19.5/495



VAPOR RICON EUROPE LIMITED,

Falcon Works, Meadow Lane, Loughborough, LE11 1HS, UK
 Tel: +44 (0) 1509 635 920
 Fax: +44 (0) 1509 261 939
 E-mail: ruk-webenquiries@wabtec.com
 Web: www.ricon.eu

RICON CORPORATION, 7900 Nelson Road, Panorama City, CA 91402 U.S.A